

High Precision C-MOS 3-Terminal Voltage Regulator

GENERAL DESCRIPTION


The NJU7231 is high precision output voltage 3-terminal positive voltage regulator.

The NJU7231 is suitable for battery operated items and battery back-up systems, because of low operating current and low dropout voltage.

PACKAGE OUTLINE



NJU7231U



NJU7231F

FEATURES

- High Precision Output $V_o \pm 2\%$
- Low Operating Current 10 μ A typ.
- Low Dropout Voltage $\Delta V_{I-O} < 0.6V$ @ $I_o = 40mA$
- Wide Operating Voltage Range
- Package Outline SOT-89/SOT-23(MTP-5)
- Bipolar Technology


OUTPUT VOLTAGE RANK LIST

| Output Voltage | SOT-89 | SOT-23 |
|----------------|------------|------------|
| +1.2V | NJU7231U12 | NJU7231F12 |
| +1.5V | NJU7231U15 | NJU7231F15 |
| +1.8V | NJU7231U18 | NJU7231F18 |
| +2.5V | NJU7231U25 | NJU7231F25 |
| +2.6V | NJU7231U26 | NJU7231F26 |
| +2.7V | NJU7231U27 | NJU7231F27 |
| +2.8V | NJU7231U28 | NJU7231F28 |
| +2.9V | NJU7231U29 | NJU7231F29 |
| +3.0V | NJU7231U30 | NJU7231F30 |
| +3.3V | NJU7231U33 | NJU7231F33 |
| +5.0V | NJU7231U50 | NJU7231F50 |
| +5.2V | NJU7231U52 | NJU7231F52 |

TERMINAL DESCRIPTION

| No. | Description | |
|-----|-------------|--------|
| | SOT-89 | SOT-23 |
| 1 | GND | GND |
| 2 | INPUT | INPUT |
| 3 | OUTPUT | OUTPUT |
| 4 | - | NC |
| 5 | - | NC |

EQUIVALENT CIRCUIT

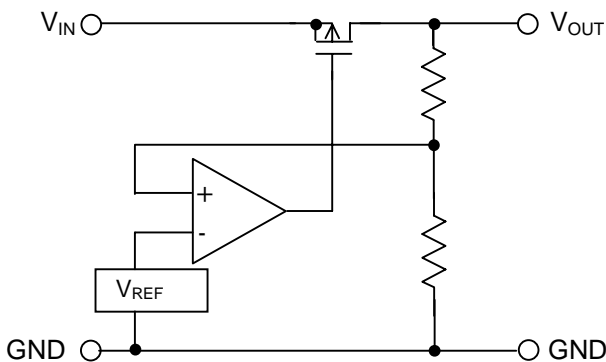

□ ABSOLUTE MAXIMUM RATING

(Ta=25°C)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------|------------------|--------------------------------|------|
| Input Voltage | V _{IN} | 18 | V |
| Output Voltage | V _{OUT} | GND-0.3 ~ V _{IN} +0.3 | V |
| Output Current | I _{OUT} | 100 | mA |
| Power Dissipation | P _D | 300 (SOT-89) 200 (MTP-5) | mW |
| Operating Temperature | Topr | - 40 ~ + 85 | °C |
| Storage Temperature | Tstg | - 55 ~ +125 | °C |

□ ELECTRICAL CHARACTERISTICS

+1.2V Version

 (C_{IN}=C_O=0.1uF, Ta=25°C)

| PARAMETER | SYMBOL | CONDITION | MIN | TYP | MAX | UNIT | CIRCUIT |
|-------------------|----------------------------------------------------------|-------------------------------------------------|-------|-------|-------|------|---------|
| Output Voltage | V _{OUT} | V _{IN} =3.0V, I _{OUT} =5mA | 1.176 | 1.200 | 1.224 | V | 1 |
| Dropout Voltage | ΔV _{IO} | I _{OUT} =0.5mA | - | 0.02 | 0.3 | V | 1 |
| Input Voltage | V _{IN} | | - | - | 15 | V | 2 |
| Operating Current | I _Q | V _{IN} =3.0V | - | 10 | 20 | uA | 2 |
| Load Regulation | ΔV _{OUT} /ΔI _{OUT} | V _{IN} =3.0V, I _{OUT} =1~15mA | - | 10 | 180 | mV | 3 |
| Line Regulation | ΔV _{OUT} /(ΔV _{IN} ·V _{OUT}) | V _{IN} =1.5~12.0V | - | 0.1 | - | %/V | 3 |

+1.5V Version

 (C_{IN}=C_O=0.1uF, Ta=25°C)

| PARAMETER | SYMBOL | CONDITION | MIN | TYP | MAX | UNIT | CIRCUIT |
|-------------------|----------------------------------------------------------|-------------------------------------------------|-------|-------|-------|------|---------|
| Output Voltage | V _{OUT} | V _{IN} =3.0V, I _{OUT} =5mA | 1.470 | 1.500 | 1.530 | V | 1 |
| Dropout Voltage | ΔV _{IO} | I _{OUT} =0.5mA | - | 0.02 | 0.30 | V | 1 |
| Input Voltage | V _{IN} | | - | - | 15 | V | 2 |
| Operating Current | I _Q | V _{IN} =3.0V | - | 10 | 20 | uA | 2 |
| Load Regulation | ΔV _{OUT} /ΔI _{OUT} | V _{IN} =3.0V, I _{OUT} =1~15mA | - | 10 | 180 | mV | 3 |
| Line Regulation | ΔV _{OUT} /(ΔV _{IN} ·V _{OUT}) | V _{IN} =1.5~12.0V | - | 0.1 | - | %/V | 3 |

+1.8V Version

 (C_{IN}=C_O=0.1uF, Ta=25°C)

| PARAMETER | SYMBOL | CONDITION | MIN | TYP | MAX | UNIT | CIRCUIT |
|-------------------|----------------------------------------------------------|-------------------------------------------------|-------|-------|-------|------|---------|
| Output Voltage | V _{OUT} | V _{IN} =3.0V, I _{OUT} =5mA | 1.764 | 1.800 | 1.836 | V | 1 |
| Dropout Voltage | ΔV _{IO} | I _{OUT} =0.5mA | - | 0.02 | 0.30 | V | 1 |
| Input Voltage | V _{IN} | | - | - | 15 | V | 2 |
| Operating Current | I _Q | V _{IN} =3.0V | - | 10 | 20 | uA | 2 |
| Load Regulation | ΔV _{OUT} /ΔI _{OUT} | V _{IN} =3.0V, I _{OUT} =1~15mA | - | 10 | 180 | mV | 3 |
| Line Regulation | ΔV _{OUT} /(ΔV _{IN} ·V _{OUT}) | V _{IN} =2.1~12.0V | - | 0.1 | - | %/V | 3 |

+2.5V Version

 (C_{IN}=C_O=0.1μF, Ta=25°C)

| PARAMETER | SYMBOL | CONDITION | MIN | TYP | MAX | UNIT | CIRCUIT |
|-------------------|----------------------------------------------------------|-------------------------------------------------|------|------|------|------|---------|
| Output Voltage | V _{OUT} | V _{IN} =4.5V, I _{OUT} =10mA | 2.45 | 2.50 | 2.55 | V | 1 |
| Dropout Voltage | ΔV _{IO} | I _{OUT} =20mA | - | 0.2 | 0.6 | V | 1 |
| Input Voltage | V _{IN} | | - | - | 15 | V | 2 |
| Operating Current | I _Q | V _{IN} =4.5V | - | 10 | 20 | μA | 2 |
| Load Regulation | ΔV _{OUT} /ΔI _{OUT} | V _{IN} =4.5V, I _{OUT} =1~20mA | - | 15 | 180 | mV | 3 |
| Line Regulation | ΔV _{OUT} /(ΔV _{IN} ·V _{OUT}) | V _{IN} =3.5~12.0V | - | 0.1 | - | %/V | 3 |

+2.6V Version

 (C_{IN}=C_O=0.1μF, Ta=25°C)

| PARAMETER | SYMBOL | CONDITION | MIN | TYP | MAX | UNIT | CIRCUIT |
|-------------------|----------------------------------------------------------|-------------------------------------------------|-------|-------|-------|------|---------|
| Output Voltage | V _{OUT} | V _{IN} =4.6V, I _{OUT} =10mA | 2.548 | 2.600 | 2.652 | V | 1 |
| Dropout Voltage | ΔV _{IO} | I _{OUT} =20mA | - | 0.2 | 0.6 | V | 1 |
| Input Voltage | V _{IN} | | - | - | 15 | V | 2 |
| Operating Current | I _Q | V _{IN} =4.6V | - | 10 | 20 | μA | 2 |
| Load Regulation | ΔV _{OUT} /ΔI _{OUT} | V _{IN} =4.6V, I _{OUT} =1~20mA | - | 15 | 180 | mV | 3 |
| Line Regulation | ΔV _{OUT} /(ΔV _{IN} ·V _{OUT}) | V _{IN} =3.6~12.0V | - | 0.1 | - | %/V | 3 |

+2.7V Version

 (C_{IN}=C_O=0.1μF, Ta=25°C)

| PARAMETER | SYMBOL | CONDITION | MIN | TYP | MAX | UNIT | CIRCUIT |
|-------------------|----------------------------------------------------------|-------------------------------------------------|-------|------|-------|------|---------|
| Output Voltage | V _{OUT} | V _{IN} =4.7V, I _{OUT} =10mA | 2.646 | 2.70 | 2.754 | V | 1 |
| Dropout Voltage | ΔV _{IO} | I _{OUT} =20mA | - | 0.2 | 0.6 | V | 1 |
| Input Voltage | V _{IN} | | - | - | 15 | V | 2 |
| Operating Current | I _Q | V _{IN} =4.7V | - | 10 | 20 | μA | 2 |
| Load Regulation | ΔV _{OUT} /ΔI _{OUT} | V _{IN} =4.7V, I _{OUT} =1~20mA | - | 15 | 180 | mV | 3 |
| Line Regulation | ΔV _{OUT} /(ΔV _{IN} ·V _{OUT}) | V _{IN} =3.7~12.0V | - | 0.1 | - | %/V | 3 |

+2.8V Version

 (C_{IN}=C_O=0.1μF, Ta=25°C)

| PARAMETER | SYMBOL | CONDITION | MIN | TYP | MAX | UNIT | CIRCUIT |
|-------------------|----------------------------------------------------------|-------------------------------------------------|-------|-------|-------|------|---------|
| Output Voltage | V _{OUT} | V _{IN} =4.8V, I _{OUT} =10mA | 2.744 | 2.800 | 2.856 | V | 1 |
| Dropout Voltage | ΔV _{IO} | I _{OUT} =20mA | - | 0.2 | 0.6 | V | 1 |
| Input Voltage | V _{IN} | | - | - | 15 | V | 2 |
| Operating Current | I _Q | V _{IN} =4.8V | - | 10 | 20 | μA | 2 |
| Load Regulation | ΔV _{OUT} /ΔI _{OUT} | V _{IN} =4.8V, I _{OUT} =1~20mA | - | 15 | 180 | mV | 3 |
| Line Regulation | ΔV _{OUT} /(ΔV _{IN} ·V _{OUT}) | V _{IN} =3.8~12.0V | - | 0.1 | - | %/V | 3 |

+2.9V Version

 (C_{IN}=C_O=0.1μF, Ta=25°C)

| PARAMETER | SYMBOL | CONDITION | MIN | TYP | MAX | UNIT | CIRCUIT |
|-------------------|----------------------------------------------------------|-------------------------------------------------|-------|-------|-------|------|---------|
| Output Voltage | V _{OUT} | V _{IN} =4.9V, I _{OUT} =10mA | 2.842 | 2.900 | 2.958 | V | 1 |
| Dropout Voltage | ΔV _{IO} | I _{OUT} =20mA | - | 0.2 | 0.6 | V | 1 |
| Input Voltage | V _{IN} | | - | - | 15 | V | 2 |
| Operating Current | I _Q | V _{IN} =4.9V | - | 10 | 20 | μA | 2 |
| Load Regulation | ΔV _{OUT} /ΔI _{OUT} | V _{IN} =4.9V, I _{OUT} =1~20mA | - | 15 | 180 | mV | 3 |
| Line Regulation | ΔV _{OUT} /(ΔV _{IN} ·V _{OUT}) | V _{IN} =3.9~12.0V | - | 0.1 | - | %/V | 3 |

+3.0V Version

($C_{IN}=C_O=0.1\mu F, T_a=25^\circ C$)

| PARAMETER | SYMBOL | CONDITION | MIN | TYP | MAX | UNIT | CIRCUIT |
|-------------------|-----------------------------------------------|-----------------------------------|------|------|------|---------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=5.0V, I_{OUT}=10mA$ | 2.94 | 3.00 | 3.06 | V | 1 |
| Dropout Voltage | ΔV_{IO} | $I_{OUT}=20mA$ | - | 0.2 | 0.6 | V | 1 |
| Input Voltage | V_{IN} | | - | - | 15 | V | 2 |
| Operating Current | I_Q | $V_{IN}=5.0V$ | - | 10 | 20 | μA | 2 |
| Load Regulation | $\Delta V_{OUT}/\Delta I_{OUT}$ | $V_{IN}=5.0V, I_{OUT}=1\sim 20mA$ | - | 15 | 180 | mV | 3 |
| Line Regulation | $\Delta V_{OUT}/(\Delta V_{IN}\cdot V_{OUT})$ | $V_{IN}=4.0\sim 12.0V$ | - | 0.1 | - | %/V | 3 |

+3.3V Version

($C_{IN}=C_O=0.1\mu F, T_a=25^\circ C$)

| PARAMETER | SYMBOL | CONDITION | MIN | TYP | MAX | UNIT | CIRCUIT |
|-------------------|-----------------------------------------------|-----------------------------------|-------|-------|-------|---------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=5.3V, I_{OUT}=10mA$ | 3.234 | 3.300 | 3.366 | V | 1 |
| Dropout Voltage | ΔV_{IO} | $I_{OUT}=20mA$ | - | 0.2 | 0.6 | V | 1 |
| Input Voltage | V_{IN} | | - | - | 15 | V | 2 |
| Operating Current | I_Q | $V_{IN}=5.3V$ | - | 10 | 20 | μA | 2 |
| Load Regulation | $\Delta V_{OUT}/\Delta I_{OUT}$ | $V_{IN}=5.3V, I_{OUT}=1\sim 20mA$ | - | 15 | 180 | mV | 3 |
| Line Regulation | $\Delta V_{OUT}/(\Delta V_{IN}\cdot V_{OUT})$ | $V_{IN}=4.3\sim 12.0V$ | - | 0.1 | - | %/V | 3 |

+5.0V Version

($C_{IN}=C_O=0.1\mu F, T_a=25^\circ C$)


| PARAMETER | SYMBOL | CONDITION | MIN | TYP | MAX | UNIT | CIRCUIT |
|-------------------|-----------------------------------------------|-----------------------------------|------|------|------|---------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=7.0V, I_{OUT}=30mA$ | 4.90 | 5.00 | 5.10 | V | 1 |
| Dropout Voltage | ΔV_{IO} | $I_{OUT}=40mA$ | - | 0.3 | 0.6 | V | 1 |
| Input Voltage | V_{IN} | | - | - | 15 | V | 2 |
| Operating Current | I_Q | $V_{IN}=7.0V$ | - | 10 | 20 | μA | 2 |
| Load Regulation | $\Delta V_{OUT}/\Delta I_{OUT}$ | $V_{IN}=7.0V, I_{OUT}=1\sim 40mA$ | - | 35 | 120 | mV | 3 |
| Line Regulation | $\Delta V_{OUT}/(\Delta V_{IN}\cdot V_{OUT})$ | $V_{IN}=6.0\sim 12.0V$ | - | 0.1 | - | %/V | 3 |

+5.0V Version

($C_{IN}=C_O=0.1\mu F, T_a=25^\circ C$)

| PARAMETER | SYMBOL | CONDITION | MIN | TYP | MAX | UNIT | CIRCUIT |
|-------------------|-----------------------------------------------|-----------------------------------|-------|-------|-------|---------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=7.2V, I_{OUT}=30mA$ | 5.096 | 5.200 | 5.304 | V | 1 |
| Dropout Voltage | ΔV_{IO} | $I_{OUT}=40mA$ | - | 0.3 | 0.6 | V | 1 |
| Input Voltage | V_{IN} | | - | - | 15 | V | 2 |
| Operating Current | I_Q | $V_{IN}=7.2V$ | - | 10 | 20 | μA | 2 |
| Load Regulation | $\Delta V_{OUT}/\Delta I_{OUT}$ | $V_{IN}=7.2V, I_{OUT}=1\sim 40mA$ | - | 35 | 120 | mV | 3 |
| Line Regulation | $\Delta V_{OUT}/(\Delta V_{IN}\cdot V_{OUT})$ | $V_{IN}=6.2\sim 12.0V$ | - | 0.1 | - | %/V | 3 |

□ MEASUREMENT CIRCUIT

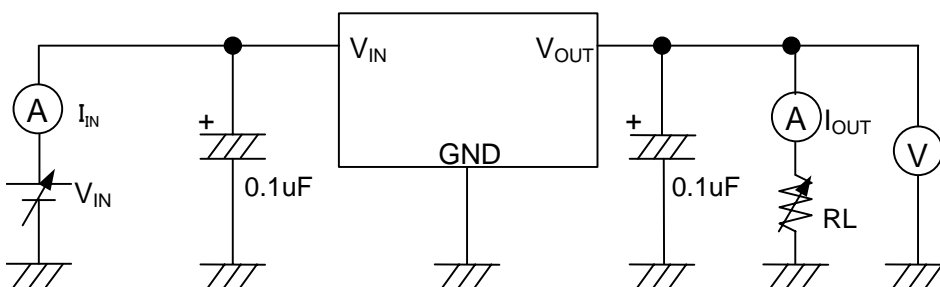

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.