

# Ultra-Small Ceramic Power Splitter/Combiner

## QCN-5+

2 Way-90° 50Ω 330 to 580 MHz



Generic photo used for illustration purposes only  
CASE STYLE: FV1206-1

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	15W* max.

\* Derate linearly to 7W at 100°C ambient.  
Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3

### Features

- low insertion loss, 0.4 dB typ.
- high isolation, 22 dB typ.
- wrap-around terminal for excellent solderability
- ultra small, 0.12"X0.06"X0.035"

### Applications

- balanced amplifiers
- modulators
- VHF
- defense communication

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 3000

### Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) Avg. of Coupled Outputs ABOVE 3 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)		VSWR (:1)	
	Typ.	Min.	Typ.	Max.	Typ. Max.	Typ.	Max.	Typ.	
$f_L$ - $f_U$									
330-580									
330-400	20	18	0.40	0.6	2.5	5	0.6	1.1	1.2
400-525	20	15	0.55	0.8	2.5	4	0.5	0.9	1.3
525-580	16	12	0.90	1.3	3.0	6	1.4	1.8	1.5

1. For applications requiring DC voltage to be applied to the RF ports, add suffix letter "D+" to part no.  
DC resistance to ground is 100 Mohms min.

### Typical Performance Data

Frequency (MHz)	Total Loss <sup>1</sup> (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
330.00	2.95	3.75	0.81	22.84	87.70	1.15	1.20	1.13
340.00	3.02	3.67	0.66	22.76	87.70	1.15	1.20	1.14
360.00	3.15	3.54	0.39	22.58	87.71	1.15	1.20	1.14
380.00	3.27	3.44	0.17	22.39	87.72	1.15	1.21	1.15
400.00	3.37	3.36	0.01	22.16	87.76	1.15	1.22	1.16
410.00	3.41	3.33	0.08	22.02	87.81	1.15	1.22	1.17
430.00	3.48	3.30	0.18	21.70	87.89	1.16	1.23	1.19
470.00	3.55	3.31	0.24	20.79	88.22	1.17	1.26	1.23
480.00	3.56	3.33	0.22	20.51	88.34	1.18	1.27	1.24
500.00	3.55	3.40	0.15	19.91	88.64	1.20	1.30	1.28
510.00	3.54	3.45	0.08	19.57	88.84	1.21	1.31	1.30
530.00	3.49	3.58	0.09	18.83	89.34	1.23	1.34	1.34
550.00	3.43	3.76	0.33	17.98	90.03	1.26	1.39	1.39
570.00	3.36	4.01	0.66	17.04	91.03	1.31	1.44	1.46
580.00	3.31	4.17	0.85	16.55	91.66	1.33	1.48	1.50


1. Total Loss = Insertion Loss + 3dB splitter loss.

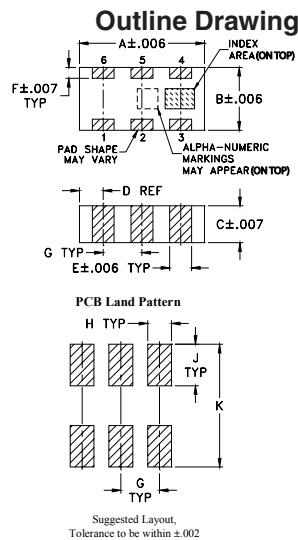

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	wt
.126	.063	.035	.024	.022	.011	.039	.024	.042	.123	grams
3.20	1.60	0.89	0.61	0.56	0.28	0.99	0.61	1.07	3.12	.020




### Demo Board MCL P/N: TB-255+ Suggested PCB Layout (PL-131)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

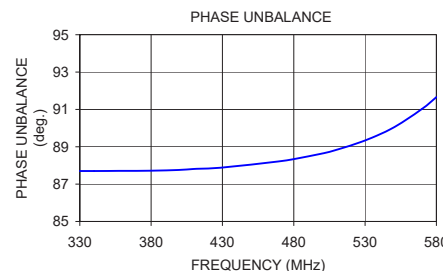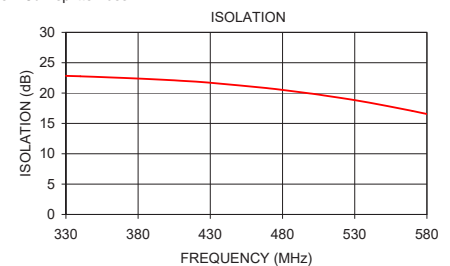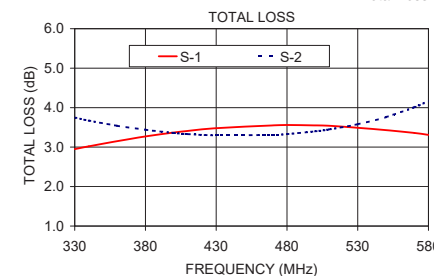

### electrical schematic (Note 1)

