Single Inverter, TTL Level

LSTTL-Compatible Inputs

The NLU1GT04 MiniGate $^{\text{m}}$ is an advanced CMOS high-speed inverting buffer in ultra-small footprint.

The device input is compatible with TTL-type input thresholds and the output has a full 5.0 V CMOS level output swing.

The NLU1GT04 input and output structures provide protection when voltages up to 7 V are applied, regardless of the supply voltage.

Features

- High Speed: $t_{PD} = 3.8 \text{ ns (Typ)} @ V_{CC} = 5.0 \text{ V}$
- Low Power Dissipation: $I_{CC} = 1 \mu A$ (Max) at $T_A = 25^{\circ}C$
- TTL-Compatible Input: $V_{IL} = 0.8 \text{ V}$; $V_{IH} = 2.0 \text{ V}$
- CMOS–Compatible Output:
 - $V_{OH} > 0.8 V_{CC}$; $V_{OL} < 0.1 V_{CC}$ @ Load
- Power Down Protection Provided on inputs
- Balanced Propagation Delays
- Ultra-Small Packages
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant




Figure 1. Pinout (Top View)



Figure 2. Logic Symbol



ON Semiconductor®

www.onsemi.com

MARKING DIAGRAMS



UDFN6 MU SUFFIX CASE 517AA





UDFN6 MU SUFFIX CASE 517AQ



N or P = Device Marking M = Date Code

PIN ASSIGNMENT

| 1 | NC | | | |
|---|-------|--|--|--|
| 2 | IN A | | | |
| 3 | GND | | | |
| 4 | OUT ₹ | | | |
| 5 | NC | | | |
| 6 | Vcc | | | |

FUNCTION TABLE

| Α | Y |
|---|---|
| L | H |
| H | L |

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 4 of this data sheet.

MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|----------------------|---|------------------------|------|
| V _{CC} | DC Supply Voltage | -0.5 to +7.0 | V |
| V _{IN} | DC Input Voltage | -0.5 to +7.0 | V |
| V _{OUT} | DC Output Voltage | -0.5 to +7.0 | V |
| I _{IK} | DC Input Diode Current V _{IN} < GND | -20 | mA |
| I _{OK} | DC Output Diode Current V _{OUT} < GND | ±20 | mA |
| I _O | DC Output Source/Sink Current | ±12.5 | mA |
| I _{CC} | DC Supply Current Per Supply Pin | ±25 | mA |
| I _{GND} | DC Ground Current per Ground Pin | ±25 | mA |
| T _{STG} | Storage Temperature Range | -65 to +150 | °C |
| T_L | Lead Temperature, 1 mm from Case for 10 Seconds | 260 | °C |
| TJ | Junction Temperature Under Bias | 150 | °C |
| MSL | Moisture Sensitivity | Level 1 | |
| F _R | Flammability Rating Oxygen Index: 28 to 34 | UL 94 V-0 @ 0.125 in | |
| V _{ESD} | ESD Withstand Voltage Human Body Model (Note 2) Machine Model (Note 3) Charged Device Model (Note 4) | > 2000 > 200 N/A | V |
| I _{LATCHUP} | Latchup Performance Above V _{CC} and Below GND at 125 °C (Note 5) | ±500 | mA |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2 ounce copper trace no air flow.
- 2. Tested to EIA / JESD22-A114-A.
- 3. Tested to EIA / JESD22-A115-A.
- 4. Tested to JESD22-C101-A.
- 5. Tested to EIA / JESD78.

RECOMMENDED OPERATING CONDITIONS

| Symbol | Parameter | Min | Max | Unit |
|------------------|---|------|-----------|------|
| V _{CC} | Positive DC Supply Voltage | 1.65 | 5.5 | V |
| V _{IN} | Digital Input Voltage | 0 | 5.5 | V |
| V _{OUT} | Output Voltage | 0 | 5.5 | V |
| T _A | Operating Free–Air Temperature | -55 | +125 | °C |
| Δt/ΔV | Input Transition Rise or Fall Rate $ V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V} $ $ V_{CC} = 5.0 \text{ V} \pm 0.5 \text{ V} $ | 0 | 100 20 | ns/V |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

DC ELECTRICAL CHARACTERISTICS

| | | | V _{CC} | T, | _A = 25 ° | С | T _A = - | +85°C | | -55°C 25°C | |
|------------------|------------------------------|---|-------------------|----------------------|---------------------|----------------------|---------------------------|----------------------|----------------------|----------------------|------|
| Symbol | Parameter | Conditions | (V) | Min | Тур | Max | Min | Max | Min | Max | Unit |
| V _{IH} | Low-Level Input Voltage | | 1.8 | 1.2 | | | 1.2 | | 1.2 | | V |
| | | | 3.0 | 1.4 | | | 1.4 | | 1.4 | | |
| | | | 4.5 to 5.5 | 2.0 | | | 2.0 | | 2.0 | | |
| V _{IL} | Low-Level Input Voltage | | 1.8 | | | 0.3 | | 0.3 | | 0.3 | V |
| | | | 3.0 | | | 0.53 | | 0.53 | | 0.53 | |
| | | | 4.5 to 5.5 | | | 0.8 | | 0.8 | | 0.8 | |
| V _{OH} | High-Level Output Voltage | $V_{IN} = V_{IH} \text{ or } V_{IL}$ $I_{OH} = -50 \mu A$ | 3.0 4.5 | 2.9 4.4 | 3.0 4.5 | | 2.9 4.4 | | 2.9 4.4 | | V |
| | | $V_{IN} = V_{IH} \text{ or } V_{IL}$ $I_{OH} = -2 \text{ mA}$ $I_{OH} = -4 \text{ mA}$ $I_{OH} = -8 \text{ mA}$ | 1.8 3.0 4.5 | 1.40 2.58 3.94 | | | 1.38 2.48 3.80 | | 1.37 2.34 3.66 | | |
| V _{OL} | Low-Level Output Voltage | $V_{IN} = V_{IH} \text{ or } V_{IL}$ $I_{OL} = 50 \mu\text{A}$ | 3.0 4.5 | | 0 | 0.1 0.1 | | 0.1 0.1 | | 0.1 0.1 | V |
| | | $\begin{aligned} & V_{\text{IN}} = V_{\text{IH}} \text{ or } V_{\text{IL}} \\ & I_{\text{OL}} = 2 \text{ mA} \\ & I_{\text{OL}} = 4 \text{ mA} \\ & I_{\text{OL}} = 8 \text{ mA} \end{aligned}$ | 1.8 3.0 4.5 | | | 0.36 0.36 0.36 | | 0.44 0.44 0.44 | | 0.52 0.52 0.52 | |
| I _{IN} | Input Leakage Current | $0 \le V_{IN} \le 5.5 V$ | 0 to 5.5 | | | ±0.1 | | ±1.0 | | ±1.0 | μΑ |
| Icc | Quiescent Supply Current | $0 \le V_{IN} \le V_{CC}$ | 5.5 | | | 1.0 | | 20 | | 40 | μΑ |
| Ісст | Quiescent Supply Current | V _{IN} = 3.4 V | 5.5 | | | 1.35 | | 1.50 | | 1.65 | mA |
| I _{OPD} | Output Leakage Current | V _{OUT} = 5.5 V | 0.0 | | | 0.5 | | 5.0 | | 10 | μΑ |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

AC ELECTRICAL CHARACTERISTICS (Input $t_f = t_f = 3.0 \text{ ns}$)

| Symbol Parameter | Vo | | V _{CC} Test T _A = 25 °C | | T _A = +85°C | | T _A = -55°C to +125°C | | | | |
|--|--|------------------------|---|-----|------------------------|------|-------------------------------------|------|------|------|----|
| | (V) | Condition | Min | Тур | Max | Min | Max | Min | Max | Unit | |
| t _{PLH} , | | 3.0 to | C _L = 15 pF | | 5.0 | 10.0 | | 11.0 | | 13.0 | ns |
| t _{PHL} lay, Input A to Output ₹ | 3.6 | C _L = 50 pF | | 6.2 | 13.5 | | 15.0 | | 17.5 | | |
| | 4.5 to | C _L = 15 pF | | 3.8 | 6.7 | | 7.5 | | 8.5 | | |
| | 5.5 | C _L = 50 pF | | 4.2 | 7.7 | | 8.5 | | 9.5 | | |
| C _{IN} | Input Capacitance | | | | 5 | 10 | | 10 | | 10.0 | pF |
| C _{PD} | Power Dissipation Capacitance (Note 6) | 5.0 | | | 10 | | | | | | pF |

^{6.} C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the dynamic operating current consumption without load. Average operating current can be obtained by the equation I_{CC(OPR)} = C_{PD} • V_{CC} • f_{in} + I_{CC}. C_{PD} is used to determine the no–load dynamic power consumption: P_D = C_{PD} • V_{CC}² • f_{in} + I_{CC} • V_{CC}.


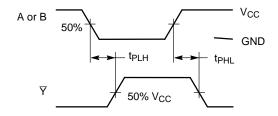


Figure 3. Switching Waveforms



*Includes all probe and jig capacitance.

A 1-MHz square input wave is recommended for propagation delay tests.

Figure 4. Test Circuit

ORDERING INFORMATION


| Device | Package | Shipping [†] |
|----------------|--------------------|-----------------------|
| NLU1GT04MUTCG | UDFN6 (Pb-Free) | 3000 / Tape & Reel |
| NLU1GT04AMUTCG | UDFN6 (Pb-Free) | 3000 / Tape & Reel |

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

6X b

0.10 С A B

0.05 С NOTE 3

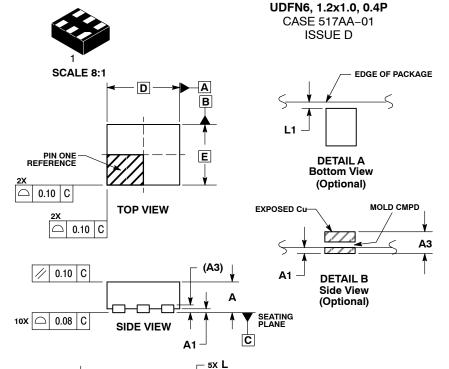

е

BOTTOM VIEW

DATE 03 SEP 2010

NOTES

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994. CONTROLLING DIMENSION: MILLIMETERS.
- DIMENSION & APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.25 AND 0.30 mm FROM TERMINAL.

 COPLANARITY APPLIES TO THE EXPOSED
- PAD AS WELL AS THE TERMINALS.

| | MILLIMETERS | | | | |
|-----|-------------|------|--|--|--|
| DIM | MIN MAX | | | | |
| Α | 0.45 | 0.55 | | | |
| A1 | 0.00 | 0.05 | | | |
| А3 | 0.127 | REF | | | |
| b | 0.15 | 0.25 | | | |
| D | 1.20 BSC | | | | |
| Е | 1.00 BSC | | | | |
| е | 0.40 BSC | | | | |
| Ĺ | 0.30 | 0.40 | | | |
| L1 | 0.00 | 0.15 | | | |
| 12 | 0.40 | 0.50 | | | |


GENERIC MARKING DIAGRAM*



= Specific Device Code = Date Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.

MOUNTING FOOTPRINT*





DIMENSIONS: MILLIMETERS

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.


| DOCUMENT NUMBER: | 98AON22068D | Electronic versions are uncontrolled except when accessed directly from the Document Reportant Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. | | |
|------------------|---------------------------|--|-------------|--|
| DESCRIPTION: | 6 PIN UDFN, 1.2X1.0, 0.4P | | PAGE 1 OF 1 | |

ON Semiconductor and (III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

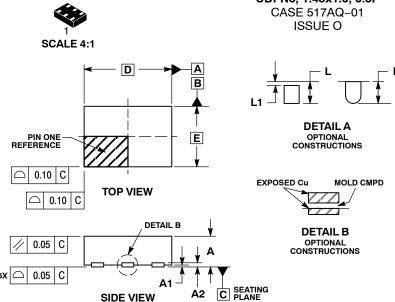



MOUNTING FOOTPRINT



DIMENSIONS: MILLIMETERS

UDFN6, 1.45x1.0, 0.5P

DATE 15 MAY 2008

- NOTES:
 1. DIMENSIONING AND TOLERANCING PER
 ASME Y14.5M, 1994.
 2. CONTROLLING DIMENSION: MILLIMETERS.

 - DIMENSION & APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30 mm FROM THE TERMINAL TIP.

| | MILLIMETERS | | | | |
|-----|-------------|------|--|--|--|
| DIM | MIN | MAX | | | |
| Α | 0.45 | 0.55 | | | |
| A1 | 0.00 | 0.05 | | | |
| A2 | 0.07 REF | | | | |
| b | 0.20 | 0.30 | | | |
| D | 1.45 BSC | | | | |
| Е | 1.00 BSC | | | | |
| е | 0.50 BSC | | | | |
| L | 0.30 | 0.40 | | | |
| L1 | | 0.15 | | | |

GENERIC MARKING DIAGRAM*



= Specific Device Code Χ

Μ = Date Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.

| DOCUMENT NUMBER: | 98AON30313E | Electronic versions are uncontrolle | • |
|------------------|---------------------------|--|-------------|
| STATUS: | ON SEMICONDUCTOR STANDARD | accessed directly from the Document versions are uncontrolled except | , , |
| NEW STANDARD: | | "CONTROLLED COPY" in red. | |
| DESCRIPTION: | UDFN6, 1.45X1.0, 0.5P | | PAGE 1 OF 2 |

^{*}For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



| DOCUMENT NUMBER: | |
|-------------------------|--|
| 98AON30313E | |

PAGE 2 OF 2

| | | † |
|-------|---|-------------|
| ISSUE | REVISION | DATE |
| 0 | RELEASED FOR PRODUCTION. REQ. BY K. VAN TYNE. | 15 MAY 2008 |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, ne patern rights for the rights of others. Scilled products are not designed, interfleed, or adultorized for use as components in systems interfleed for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ON Semiconductor and the are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

ON Semiconductor Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative